

# MV cables Tools

## MF2/60-S



### Certifications

Approved by ENEDIS

### Section

MV Multifunction

### Application

Field  
Laboratory



### PRODUCT BENEFITS

Tuning of the pitch of the tool  
Embedded wear pads to protect the tool from the contact with the outer sheath

### TOOL CAPACITY

**Diameter** 16 - 58 mm  
0,630 - 2,283 inch

**Outer sheath and insulation thickness capacity** 11 mm / 0,433 in

### TOOL DIMENSIONS

**Length** 170 mm

**Width** 90 mm

**Height** 120 mm

**Weight without box** 1,4 Kg

**Packaging** Box

### ALROC SAS

Z.I. de la Fonderie - 72160 TUFFE

FRANCE

Phone: +33 2 43 71 11 80


Fax number : +33 2 43 71 16 51

www.alroc.fr

## Multifunction tool for outer sheath and insulation

### TO DO WHAT

The MF2/60-S enables the user to :  
Remove the outer sheath (PE-PVC-PR) with a straight and neat cut  
Set the length and remove thicker insulation with a straight and neat cut

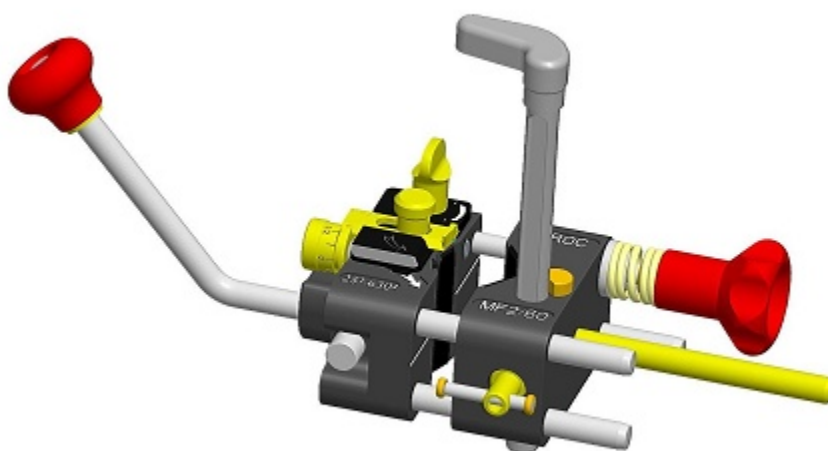

### Spare part

KIT-MF3/40 - Protective wear pads  
LMF2-S - Spare blade for outer sheath and thick insulation  
BR - Thrust to set the length of insulation to be remove  
VBB1 - Screw for locking the thrust  
PCR - Quick set up right angled 45° handle  
196855 - Straight handle M10  
108098 - Clamping knob for blade

### Associated tool

MF1+/25 - Multifunction tool for bonded semiconductor  
SRC - Scoring stylus for peelable semiconductor with chamfer

MV cables Tools  
**MF2/60-S**



Part Number	Diameter	Tool capacity	Dimensions			Packaging
		Outer sheath and insulation thickness capacity	Length	Width	Height	
<b>MF2/40</b>	16 - 40 mm 0,630 - 1,575 in	7 mm / 0,275 in	150 mm 5,906 in	80 mm 3,150 in	100 mm 3,937 in	box
<b>MF2/40-S</b>	16 - 40 mm 0,630 - 1,575 in	11 mm / 0,433 in	150 mm 5,906 in	80 mm 3,150 in	100 mm 3,937 in	box
<b>MF2/60</b>	16 - 58 mm 0,630 - 2,283 in	7 mm / 0,275 in	170 mm 6,693 in	90 mm 3,543 in	120 mm 4,724 in	box
<b>MF2/60-S</b>	16 - 58 mm 0,630 - 2,283 in	11 mm / 0,433 in	170 mm 6,693 in	90 mm 3,543 in	120 mm 4,724 in	box